



## **6" SSR SERIES**

The SSR Series pumps are designed specifically to meet a variety of applications. With a complete stainless steel construction, including impellers and diffusers, the SSR Series pumps are equipped to operate efficiently and handle the most demanding conditions.

#### **FEATURES**

- Stainless steel impellers and diffusers to resist corrosion
- PTFE floating wear ring, ceramic bearing journal, and Nitrile rubber-fluted bearing ensure durability against wear for long-lasting performance and reliability
- Suited to operate in vertical or horizontal orientations
- Four-strap design reduces irregular compression loading
- Built-in check valve to protect the pump against water hammer
- Energy-efficient hydraulic design for cost-effective operation
- Fully serviceable mechanical design

### **SPECIFICATIONS**

CAPACITY	100 TO 325 GPM
Heads	Up to 1400 ft
Efficiency	Up to 80%
Discharge size	3" NPT
Motor	4" & 6" *
Materials of construction	304SS
Flow Ratings	100, 150, 250, & 325 gpm

<sup>\*</sup> Order 4" motor kit

#### **APPLICATIONS**

- Industrial
- Agricultural
- Irrigation
- Commercial
- Municipal








# **6" SSR SERIES**

## PERFORMANCE - 6" MODELS

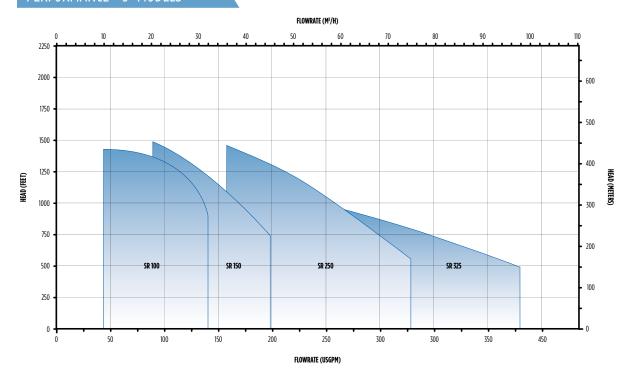





franklinwater.com Mi2181 03-17